

iMDC Series Single Cabinet Data Center

iMDC Product Introduction ▼

The iMDC series single cabinet data center integrates UPS, air conditioner, power distribution module, power and environment monitoring system, temperature and humidity detection, light and access control in a standard 19-inch server cabinet. All equipment is pre-installed and pre-commissioned in the factory. The on-site installation is easy and convenient, which can realize rapid deployment, occupy less area, and come with remote web interface monitoring function, which can realize remote operation and maintenance of a site.



Product Features ▼



Safe and reliable

- All components follow domestic and international standardized production standards to ensure product quality.
- Pre-installation, pre-commissioning and other process are controlled at various levels to ensure product installation and operation safe and reliable.
- A single cabinet is a complete system, suitable for various complex scenes (dust, narrow space, no insulation measures, etc.).
- Integrated design, overall delivery, avoid system design problems.
- The door pop-up system can delay the aisle overheating and reserve time for data backup.
- The cabinet integrates an intelligent monitoring system to ensure safe and reliable operation of the computer room.



Easy installation and rapid deployment

- Modular design of power distribution, easy installation and maintenance.
- Rack-mounted air conditioner indoor unit, pipe thread connection, easy maintenance.
- The computer room does not need special decoration treatment, and the equipment is ready to use. Installation and commissioning cycle only need 3 hours.
- A single cabinet is a complete system, plug and play.



High efficiency and energy saving

- Proximal refrigeration, high-efficiency power supply, and the overall annual average PUE of single cabinet ≈ 1.30 .
- The power distribution, UPS, monitoring, and refrigeration cabinets are integrated to save space.
- Engineering free design, free decoration and wiring, remote operation and maintenance are not on duty, saving TCO.



Intelligent management

- The monitoring system is extensible and compatible with third-party monitoring systems; friendly HMI.
- Support local and remote WEB interface access, SMS alarm function.

Structure and Composition ▼



Applicable Scene ▼

- Computer rooms of medium and small enterprises, large enterprises, government branch offices.
- Financial business offices, communication business halls and base stations.
- Commercial retail institutions, tourist attractions.
- Gas stations, toll stations, smart buildings.
- Grassroots public security agency, government agency.


Floor area ▼

The overall area of a single cabinet is 0.72m², which is suitable for computer rooms within 10-20 m², such as small archives.


System Capacity ▼

Capacity of single cabinet $\approx 3 \sim 5$ kVA

Product Layout Diagram ▼

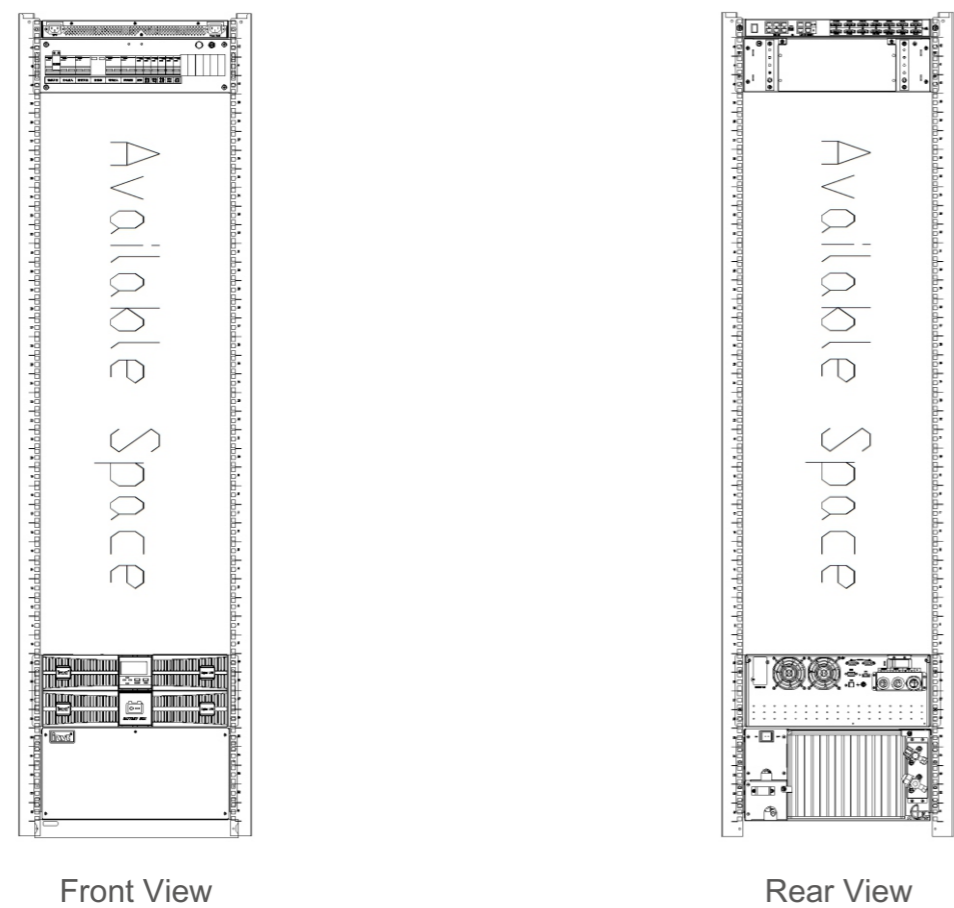

Airflow Reference Chart ▼

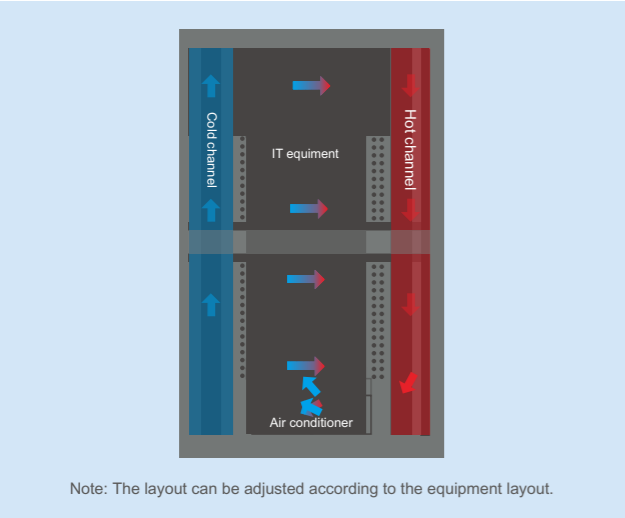

Application Scenario ▼



Product Configuration ▼

iMDC Series Integrated Cabinet Solution		
System	IT rated power	3-5kW
	Mains	220Vac,50Hz/60Hz
	Ambient temperature	0-45℃
	Ambient humidity	10-95% (Relative humidity)
	IP Class	IP5X
	Altitude	1000m, dereating for >1000m
Cabinet	Dimension (W*D*H)	600*1200*2000mm(Without caster)
	Space occupation	≤32U
	Display	10.1'' touch screen LCD
	Lighting	Front and rear LED, front Tri-color LED
	Cable entry	Top and bottom
	Access control system	Fingerprint +IC/ID card + Password
Power Supply and Distribution System	Distribution module	63~80A
	UPS	Rackmounted, 3kVA/6kVA
	Battery	Built-in battery or external battery cabinet
	PDU	2pcs, 16 ports (13*C13+3*C19)
Monitoring System	Supervision system	Intelligent integrated monitoring host
	Single cabinet	Single cabinet control module
	Centralized Monitoring	smoke sensor*1
		Temperature&humidity sensor*1
		Water leakage sensor*1
		Webcam (optional)
		Infrared detector(optional)
		SMS alarm (optional)
Emergency Ventilation	Method	Emergency pop-up door system
Cooling System	Rated cooling capacity	3.7-7.5kW
	Rated air volume	700-1350m³/h
Mechanical	Package dimensions	720*1338*2230mm
	Cabinet color	Black (RAL9004)

Standard Parts and Optional Parts List ▼

Standard Parts	Intelligent Control Screen	Single Cabinet Control Module	Power Distribution Module	PDU*2	Tri-color LED	Lamp
	Outdoor Unit	Indoor Unit	Access Control	Temperature& Humidity Sensor	Water Leakage Sensor	IC Card *1
Optional Parts	UPS	Infrared Detector	Cover Plate	Webcam	SMS Alerter	Audible and Visual Alarm
	Floating Nut	Battery Pack	Battery Cabinet	IC/ID Card	L-Rail	Tray